


PH 649 - CONCRETE DELIVERY HOSE

Polyhose Proprietary Product

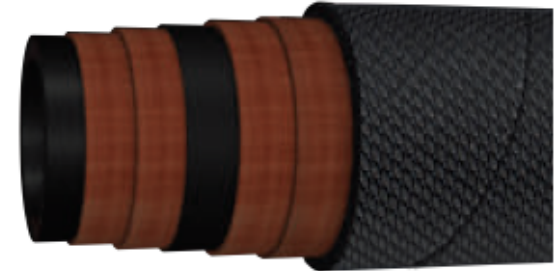

Construction

- Core** Black colour, Synthetic and natural rubber blend resistant to abrasion
- Reinforcement** High Tensile Synthetic Textile Cord with 2 cross anti static wire
- Cover** Black colour, Synthetic rubber resistant to ozone, weather and abrasion
- Application** Designed for concrete pumping in construction industry

Item Code	Dash Size	ID		OD		WP		BP		W
		inch	mm	inch	mm	psi	bar	psi	bar	kg/m
PH 649-20	-20	1.1/4	32.0	1.93	49.0	1235	85	2465	170	1.60
PH 649-24	-24	1.1/2	38.0	2.20	56.0	1235	85	2465	170	1.80
PH 649-32	-32	2	51.0	2.80	71.0	1235	85	2465	170	3.00
PH 649-40	-40	2.1/2	64.0	3.43	87.0	1235	85	2465	170	3.77
PH 649-48	-48	3	76.0	4.02	102.0	1235	85	2465	170	4.90
PH 649-56	-56	3.1/2	88.0	4.53	115.0	1235	85	2465	170	5.66
PH 649-64	-64	4	102.0	5.20	132.0	1235	85	2465	170	7.36
PH 649-80	-80	5	127.0	6.18	157.0	1235	85	2465	170	8.92



Temperature Range: Continuous: -30°C to +70°C